

# FleetPC-13

## Intel® Core™ Processors (14th Gen) with Discrete GPU Options and High Expandability Edge AI Computer



- Intel® Core™ Processor (14th Gen)
- NVIDIA RTX™ Embedded and Intel® Arc™ GPU Options for Scalable AI Accelerating Solution
- 8 x GbE with PoE+ Option Provides Simplified Connection to Edge Devices
- Dual M.2 Key B for WWAN and Dual SIM Support for Network Redundancy

## Specifications

### System

#### Processor

- Intel® Core™ (14th gen) i9-14900T 24C/32T processor
- Intel® Core™ (14th gen) i7-14700T 20C/28T processor
- Intel® Core™ (14th gen) i5-14500T 14C/20T processor

#### Graphics

- Processor-integrated GPU - Intel® UHD Graphics 770
- Optional discrete GPU - NVIDIA RTX™ Embedded 2000 Ada / 3500 Ada / 5000 Ada Intel® Arc™ A370E

#### Chipset

- R680E

#### Memory

- 2 x DDR5-5600 SO-DIMM up to 96GB (ECC support with ECC DRAM)

#### Security

- TPM 2.0, dTPM

#### Watchdog

- Auto reset for unresponsive system (custom 1-255 sec/min settings in BIOS)

### Interface

#### Video

- Without discrete GPU - 2 x DP++ up to 7680 x 4320 @ 60Hz 2 x HDMI® up to 3840 x 2160 @ 60Hz as specified in HDMI 2.0b
- With discrete GPU - Additional 2 x DP++ up to 7680 x 4320 @ 60Hz Additional 2 x HDMI® up to 3840 x 2160 @ 60Hz as specified in HDMI 2.0b

\* DP 4 port not supported when equipped with NVIDIA RTX™ Embedded 2000 Ada

#### Audio

- 1 x Line-out, 1 x Line-in, 1 x Mic-in

#### Ethernet

- 2 x 2.5GbE (Intel I226) via RJ-45
- 8 x GbE (Intel I210) via RJ-45 (optional PoE+ and M12 X-code)

\* 2.5G port 1 supports Intel® AMT, PXE boot, and Wake-on-LAN

\*\* PoE supports 25.5W per port with total power budget: 120W

#### USB

- 8 x USB 3.2 Gen 2

#### DIO

- 8 x DI (DC 5-60V), 4 x DO (DC 5V/100mA)

#### ADC

- 2 x ADC (DC 0-60V)

#### COM

- 4 x RS-232/422/485

### Internal Expansion

#### M.2

- 2 x M.2 3042/3052 Key B for WWAN w/ dual SIM support
- 1 x M.2 2230 Key E for Wi-Fi/BT

\* Thermal solution is required for M.2 5G Module.

#### Mini PCIe

- 2 x Mini PCIe (full-size)

### Storage

#### Type

- 1 x M.2 2280 Key M for NVMe/SATA SSD
- 2 x M.2 2280 Key M for NVMe SSD
- 2 x Removable tray for 2.5" SATA SSD

\* RAID 0/1/5 support via Intel® VMD.

### Power

#### Power Input

- DC 9-60V (nominal power input DC 12V/24V/48V) via 5-pin terminal block

\* Nominal power input of DC 24V or above is required for system with discrete GPU.

#### Power Protection

- OCP, OVP, surge protection, reversed polarity protection

#### Power Management

- Ignition detection, Smart Power Management

#### Battery Backup Unit (BBU)

- Optional battery kit for up to 10 minutes emergency backup time (Battery charging Temp. 0°C ~ 45°C and discharging Temp. -10°C ~ 60°C)

\* BBU backup time varies depending on actual overall system power consumption and battery is required to be charged before being used for system power backup.

\*\* Operating temperature will be limited within -10°C and 60°C with the battery kit installed.

Patent No.: M447854 (Built-in battery)

### Software

#### Operating System

- Windows 11 IoT Enterprise LTSC
- Ubuntu 22.04 LTS

### Environmental

#### Operating Temp.

- -40°C ~ 70°C (-40°F ~ 158°F) with 0.6 m/s airflow

\* Operating temperature varies by accessories installed.

#### Storage Temp.

- -40°C ~ 80°C (-40°F ~ 176°F)

#### Relative Humidity

- 10% RH ~ 90% RH (non-condensing)

#### Vibration

- IEC 60068-2-64, random, 2.5G@5~500Hz, 1hr/axis
- MIL-STD-810H, Method 514.8, Procedure I, Category 4

#### Shock

- MIL-STD-810H, Method 516.8, Procedure I, trucks and semi-trailers=15G (11ms)

### Certification / Compliance

- CE, FCC Class A, UKCA, E-Mark, EN 50155, EN 45545-2 (R25)

### Mechanical

#### Construction

- Aluminum Alloy

#### Antenna

- 8 x SMA connector mounting hole

#### Mounting

- Wall mounting

#### Net Weight

- 5.70 kg (12.57 lb)


#### Dimensions (L x W x H)

- 260 x 250 x 98 mm (11.42 x 9.84 x 3.86 in.) without wall mounting

#### Ingress Protection

- IP40

## Dimensions

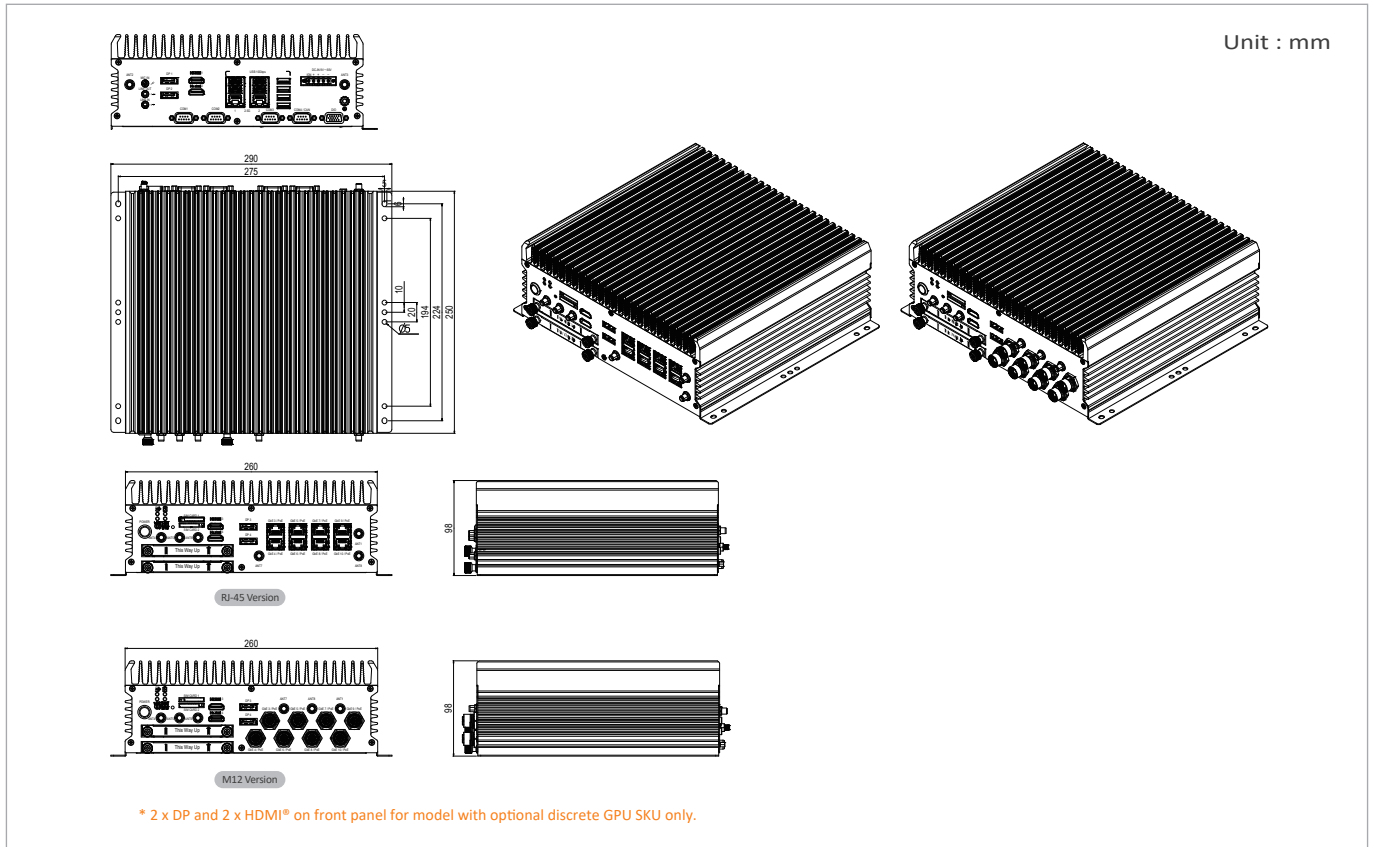

## Ordering Information

Model Number	FleetPC-13-(P)(G)(-M12X)-zz (P= w/ PoE, G=w/ Discrete GPU, M12X=w/ M12 X-coded connectors, zz=i9=i9-14900T, zz=i7=i7-14700T, zz=i5=i5-14500T)
Description	Intel® Core™ Processors (14th Gen) with Discrete GPU Options and High Expandability Edge AI Computer
State of Origin	Made in Taiwan

## Optional Discrete GPU

Discrete GPU	Graphic Cores	Memory Type/Size	AI TOPS*	System Operating Temp.
NVIDIA RTX™ Embedded 5000 Ada Generation	9728 CUDA / 304 Tensor	GDDR6 16GB	682	0°C ~ 60°C
NVIDIA RTX™ Embedded 3500 Ada Generation	5120 CUDA / 160 Tensor	GDDR6 12GB	369	0°C ~ 60°C
NVIDIA RTX™ Embedded 2000 Ada Generation	3072 CUDA / 96 Tensor	GDDR6 8GB	232	0°C ~ 70°C
Intel® Arc™ A370E	8 X <sup>e</sup> -cores / 128 Execution Units	GDDR6 4GB	56	0°C ~ 70°C

\*AI TOPS Precision - FP8 for NVIDIA RTX™ Embedded Ada Generation, INT8 for Intel® Arc™.

## Optional Accessories

Memory	DDR5-5600 SO-DIMM, 8GB to 48GB, -40°C ~ 85°C (ECC option available)
Storage	M.2 2280 Key M NVMe SSD w/ thermal kit, -40°C ~ 85°C M.2 2280 Key B-M SATA SSD w/ thermal kit, -40°C ~ 85°C 2.5" SATA SSD, -40°C ~ 85°C
Wi-Fi	M.2 2230 Key A-E Wi-Fi module, -40°C ~ 85°C
WWAN	M.2 3042/3052 Key B WWAN module w/ thermal kit, -40°C ~ 85°C
GNSS	Mini PCIe GNSS module, -40°C ~ 85°C
CAN Bus	Mini PCIe CAN module, -40°C ~ 85°C
Battery (BBU)	BAT-5200 battery kit, charging Temp. 0°C ~ 45°C, discharging Temp. -10°C ~ 60°C
Power Adapter	AC/DC 100-240V/24V 280W C14 bare wire power adapter