


398.00 EUR  
incl. 19% VAT, plus [shipping](#)

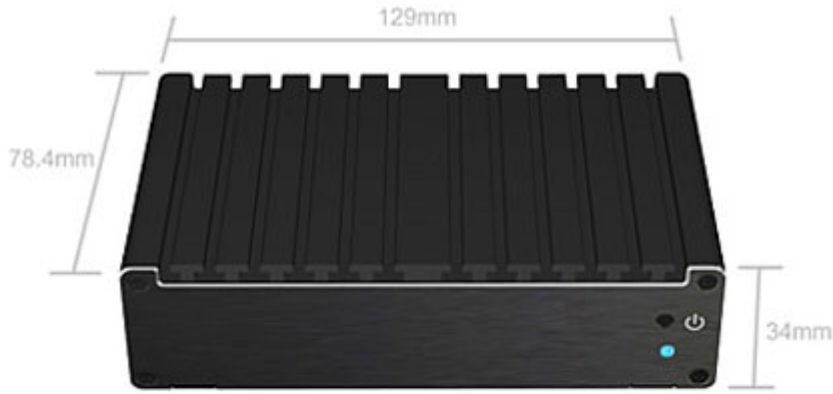

- INTEL® Bay Trail-M N2930, N2807 SoC Processor
- Embedded Long-life Series, Planned Lifecycle through Q1'2019
- Pico-ITX Form Factor Fanless Systems
- 12V DC jack on back panel for external power supply
- HDMI output, Full-size mSATA support
- ECO-design for EuP/ErP

<b>Model No</b>	<b>JBC400P93-2930   JBC400P93-2807</b>	<b>JBC400P93W-2930   JBC400P93W-2807</b>
<b>Part No</b>	<b>HBJC400P93-2930   HBJC400P93-2807</b>	<b>HBJC400P93W-2930   HBJC400P93W-2807</b>

**Motherboard Specification**

<b>CPU</b>	Fanless INTEL® Bay Trail-M Celeron N2930 SoC Processor 1.83GHz, Quad-Core, 7.5W Fanless INTEL® Bay Trail-M Celeron N2807 SoC Processor 1.58GHz, Dual-Core, 4.3W
<b>Memory</b>	Onboard 2GB DDR3L-1333, non-expandable
<b>VGA</b>	Intel® HD Graphics
<b>LAN</b>	1 x Realtek 8111G PCI-E Gigabit Ethernet
<b>Audio</b>	Intel® HDMI Audio

---

<b>Storage</b>	1 x full size mSATA Slot
<b>Wireless / Mini-PCIE Slot</b>	1 x half size Mini-PCI Express Slot      Wireless 802.11 b/g/n + Bluetooth 4.0
<b>Board Form Factor</b>	Pico ITX Form Factor (100mm X 72mm)
<b>Chassis Specification</b>	
<b>Product size</b>	129 * 78.4 * 34 mm
<b>Material</b>	Lightweight aluminum alloy with extruded aluminum IO panel
<b>Color</b>	Black and Silver
<b>HDD</b>	NA
<b>Front I/O Port</b>	1 * Power Button 1 * Power LED
<b>Rear I/O Port</b>	1 * USB 3.0 port 1 * USB 2.0 port 1 * HDMI 1 * RJ-45 port 1 * 12V DC-in jack 2 * SMA Connector for WiFi Antenna 1 * Kensington Lock Hole
<b>Power</b>	Adapter : AC_90~240V / DC_12V_3A/36W
<b>Environment</b>	Operating Temperature : 0°C ~ 40°C with air flow Storage Temperature : -20°C ~ 80°C
<b>Standard Accessory</b>	√ 36W AC Adapter x1 √ Power Cord x1 √ Screw pack x1 √ DVD Disk x1 √ Manual x1 √ Wall / VESA / Din Rail Mount Bracket √ Din Rail Clip √ WIFI antenna (with HBJC400P93W-2930 model)
<b>Functional</b>	Digital Signage, Set Top Box, Thin Client, Car Entertainment, Smart Mini PC, POS/POI, KIOSK, HTPC
<b>Certificate</b>	CE,FCC,ErP For Barebone CE,FCC,TUV,UL,CCC,CB,ErP For Power Adapter